
Model No. : MBV-FD

Our electric actuated Alis ball valves offer precise control and rapid response in a durable, compact design. Ideal for applications requiring on/off control with minimal pressure drop,
these valves ensure efficient operation and reliable performance in demanding environments.



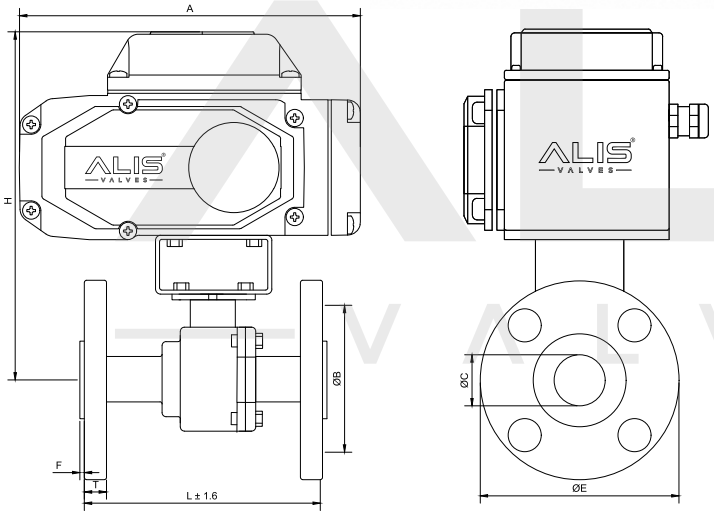

Norminal Diameter: 15-100
Pressure Range: 0-16-25-40 bar
Medium Temperature: -10°C to 180°C
Environment Temperature: -10°C to 60°C
Body Material: Stainless Steel, Cast Steel
Sealing Material: PTFE
Body Actuator: Aluminum Alloy
Power: AC 110- 380V, DC 24V
Feature: On-Off Type, Regulated Type
Manufacturing Standard: GB,BS,ANSI

Dimensions

Model	L	T	f	E	B	C	H	A	N-M	Actuator
15	130	14	2	95	65	45	178	160	4-ϕ14	B-05
20	140	15	2	105	75	54	185	160	4-ϕ14	B-06
25	150	16	2	115	85	65	188	160	4-ϕ14	B-07
32	165	16	2	135	100	75	197	160	4-ϕ18	B-08
40	180	17	2	145	110	80	232	160	4-ϕ18	B-10
50	200	18	2	160	125	98	240	198	4-ϕ18	B-10
65	220	18	2	180	145	113	294	255	4-ϕ18	B-20
80	250	18	2	195	160	130	306	255	4-ϕ18	B-20
100	280	20	2	215	180	148	321	255	4-ϕ18	B-40

All Dimensions Are In mm